

Mini-Vertical Series

Mini-Vertical Series II, a self-contained height measuring and scribing instrument, now with direct RS232 output and resolution of .00005"/.001mm. The new generation Mini-Vert uses the same accessories as its predecessor.

- · Zero setting at any position
- Input of preset values and recall
- Setting and display of tolerance limits. Min/Max/Tir modes
- · Hold display function
- Inch/Metric selection
- Two reference datums (Ref. I/Ref. II)
- · Accurate and positive measurements
- · Measuring pressure approx. 3N
- · Bidirectional data output
- Maximum displacement velocity of measuring carriage 40"/sec. (1m/sec.)
- Power supply: 3 V lithium battery (1) #CR 2032
- Robust design for harsh environments

Standard Equipment

Each unit includes:


- Main probe holder 5.9"(150mm)
- One ball probe 8mm diameter
- Protection cover
- · Instruction manual
- · Test and guarantee certificate





Model: 54-180-212 & 215 54-180-224 & 226 54-180-	101
Measuring range: 12.6" (320mm) 24.4" (620mm) 40"(102)))
Accuracy over full range: .0008" (.02mm) .0012" (.03mm) .0016"(.0maximum error))4mm)
Weight with cast iron base: 13.7 lbs. 23.2 lbs. 45 lbs.	
Weight with granite base: 30.9 lbs. 40.4 lbs	

Part Number	Description
54-180-212	12.6"(320mm) Mini-Vertical with cast iron base
54-180-215	12.6"(320mm) Mini-Vertical with granite base
54-180-224	24.4"(620mm) Mini-Vertical with cast iron base
54-180-226	24.4"(620mm) Mini-Vertical with granite base

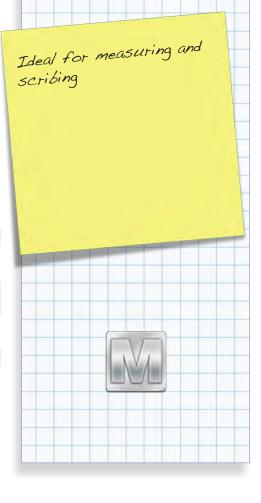

Swiss Quality!

-owler

-owler

RS-232

BI-DIRECT